

# Economy 6/3 Frame Hand Crank Extractor & Easy Extractor Combo Unit



Product # HH-160 & HH-162

501 1st Street S.  
Hackensack MN 56452  
800-880-7694

Mann Lake Ltd.

[www.mannlakeltd.com](http://www.mannlakeltd.com)

1250 Harter Avenue  
Woodland, CA 95776  
866-880-7678

January 5, 2009 10:12 AM


Congratulations on purchasing your new extractor. Shown below are just a few things you need to do before you begin extracting. If you have any difficulty with assembly or if you have any questions at all, please feel free to call us at 800-880-7694. Experienced help is only a phone call away.



Step 1- Remove the brackets from the extractor and place on a level surface. The flat side of the brackets face each other. Place the first half of the lid into the brackets and slide into place.



Step 2- Flip the brackets into an upward position. Place the lid on the extractor with the cutout portion sliding under the largest side of the crank assembly. Lower the brackets into place over the bolt and secure with the washer and nut.

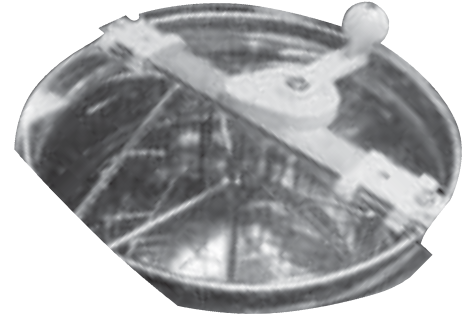

Step 3- On the opposite side, place the lid into the brackets and slide into place.





Step 4- Put the hex bolt through the hole in the knob and attach to the crank handle. Tighten with allen wrench that is provided.



If you have purchased the optional stand or the extractor combo you will need to place the extractor into the opening created by the 3 legs. It will be a snug fit so no hardware is used to attach the stand to the extractor, The stand "feet" have a hole that can be used to mount the extractor to the floor or a platform. A 4' x 4' sheet of plywood which would steady the extractor as you crank.

Frames should be uncapped prior to extracting. When extracting 9 1/8" or 6 1/4" frames with wax foundation the frames will need to be rotated during extraction. Extract side one approximately 50%, turn the frame to sided 2 extract 100%, then return to side one and extract the remaining 50%. Rotating the frame will lessen the occurrence of blowouts in the foundation from the weight of the honey. If plastic foundation is used, it is possible to extract each side 10% before turning. 5 11/16" frames are placed radially as shown below. It is not necessary to turn frames placed radially.

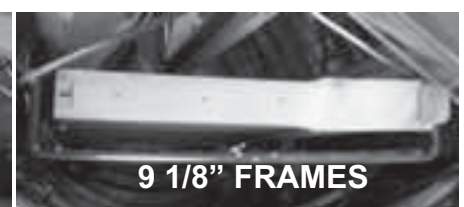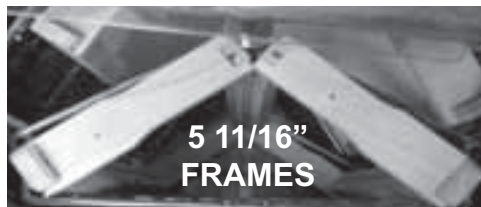


Extractors are not intended for use as storage containers, promptly transfer all honey from the extractor to a storage or bottling unit.

**One Year Limited Warranty:** Mann Lake Ltd. warrants this product, to original purchaser, for one year from purchase date to be free of defects in materials and workmanship. This warranty is the only written or express warranty given by Mann Lake Ltd. ALL IMPLIED WARRANTIES OF MERCHANTABILITY AND OF FITNESS ARE HEREBY EXCLUDED. Mann Lake's obligation under this warranty is limited to repair or replacement of the product, at its option. Return the defective product postage paid with proof of date of purchase to Mann Lake Ltd. 501 1st Street S Hackensack, MN 56452-2589. IN NO CASE SHALL MANN LAKE LTD. BE LIABLE FOR ANY INCIDENTAL OR CONSEQUENTIAL DAMAGES FROM BREACH OF THIS WARRANTY.

# Mann Lake Ltd.

## HH-160 Extractor

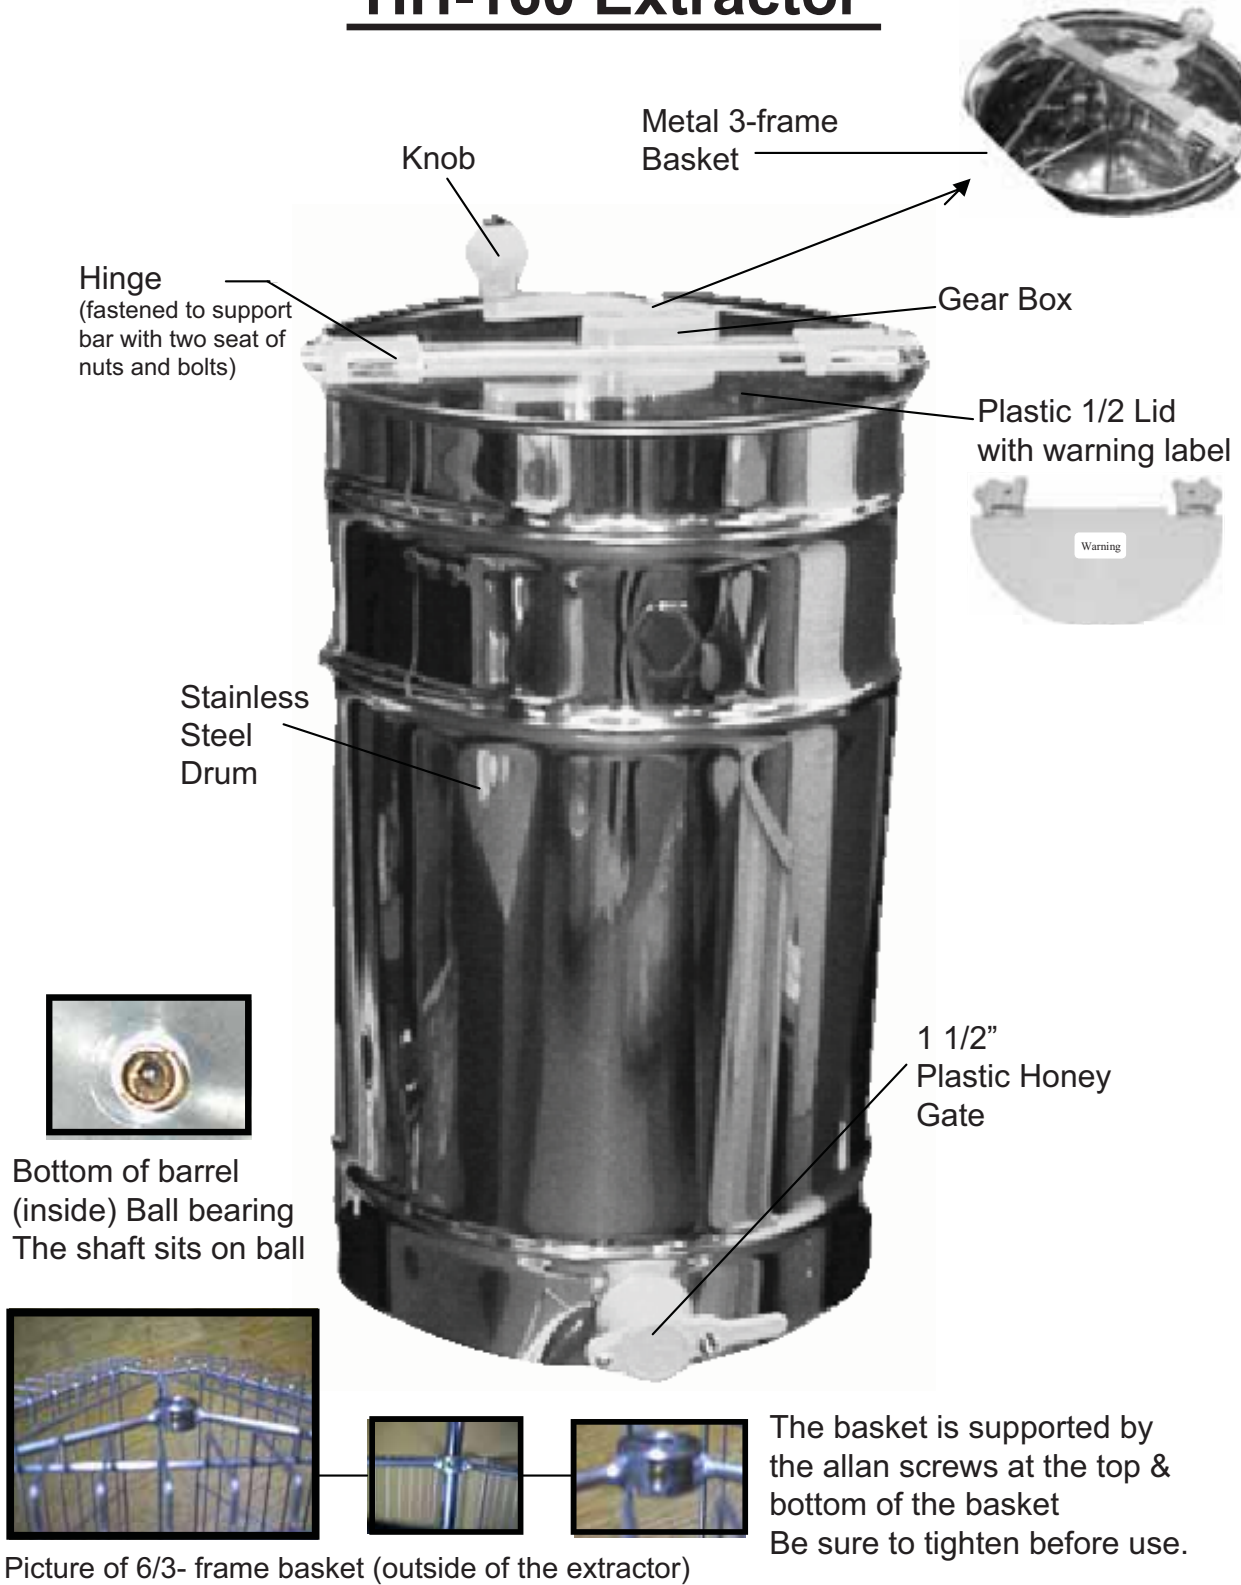



# Mann Lake Ltd.




## HH-160 Extractor

### Part List

PART	IN	ON	PACKED SEPARATELY OR FOAM
1- Stainless Steel Drum		X	
1- 3 Frame Welded Metal Basket	X		
<b>HH-805</b> 1- Handle	X		
<b>HH-805</b> 1- Gear Box		X	
<b>HH-805</b> 1- Knob	X		
1- Bolt For Handle	X		
<b>HH-800</b> 2- 1/2 Circle Plexiglas Lid W/ Caution Label			X
<b>HH-810</b> 2- Hinges		X	
4- Flang Nuts 8mm For Hinges 4- Bolts Metric 8x20 For Hinges		X	
<b>HH-606</b> 1- Honey Gate		X	
36-122 36- 123 2- Allen Wrenches 1-3 MM 1-6MM	X		
Shaft	X		
2- Screws to Hold Basket to Shaft 5/16	X		
5/16 Ball Bearing	X		
<b>INSPECTED BY-</b>			


# IMPORTANT

## Special Safety Instructions (Lid Attachment)

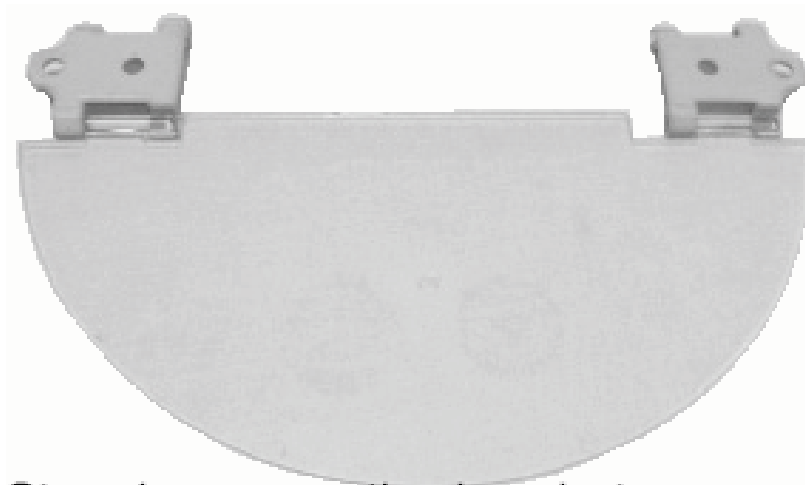


When you put the lid on the extractor you must be able to read the embedded writing on the lid (or warning label if applied). **STEP 1-** Hold the lid at a 45 degree angle. **STEP 2-** Place the plastic tees down on the right sides of the hinge. **STEP 3-** Slide to the left so that the left side of the tee goes in the secured bracket, once it is secured you should be able to lay the lid down. **CAUTION:** While the lid is down the clear plastic should not be overlapping any part of the yellow hinge on either side.

### STEP 1



### STEP 2



### STEP 3



### CAUTION

