

ASSEMBLY INSTRUCTIONS FOR 10 FR HIVE TOP FEEDER

Included in box:

- Top Feeder Insert
- 3 Phillips Head Screws
- 1 Screen

FD-129

FD-629


FD-729



Tools needed to assemble Top Feeder Insert:

- Phillips Screwdriver

Take the screen and place it over the center divider of the top feeder insert. (Pictured at right.)

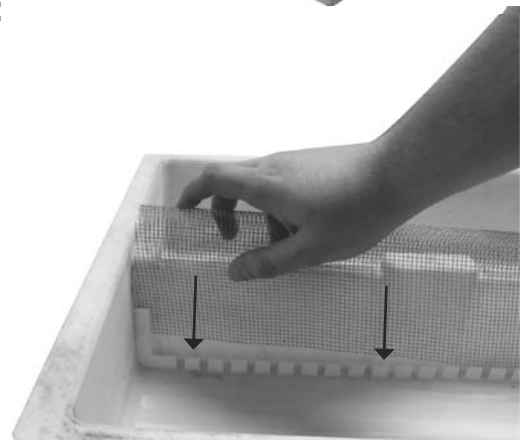

Make sure the screen fits down firmly into the channel at the bottom of the top feeder insert. (Pictured at right.) The screen must be placed properly on top of the insert to prevent bees from gaining access to the reservoirs.





MANN LAKE
WE KNOW BEES


501 1st St S, Hackensack, MN 56452
500 Santa Anita Dr., Woodland, CA 95776
485 Stewart Rd, Wilkes-Barre, PA 18706
1600 Commerce Street, Marshall, TX 75672

Telephone: 800-880-7694
www.mannlakeltd.com

Next you will take your phillips head screwdriver and apply one screw into the center screw port on the insert. Use pressure when screwing and turn until the screw is tight in the plastic and will not turn anymore. (Pictured at right.)

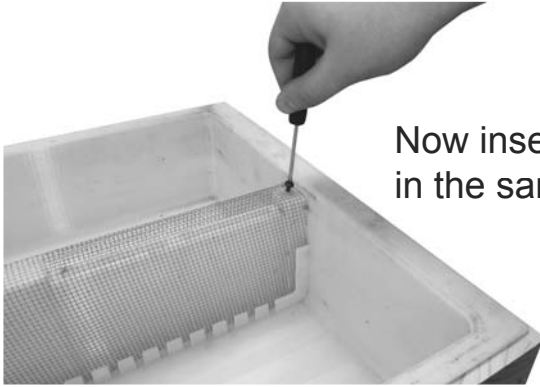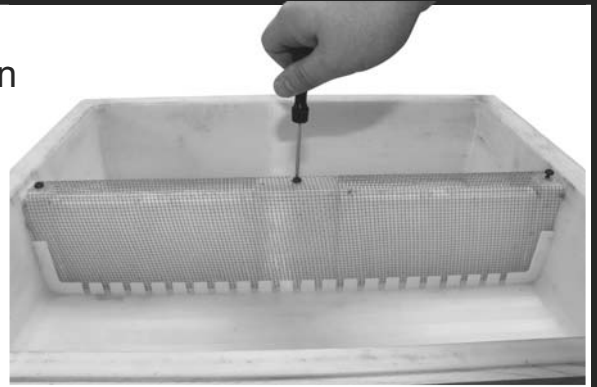

Now insert a screw on the left and right side of the feeder in the same fashion. (Pictured at left.)

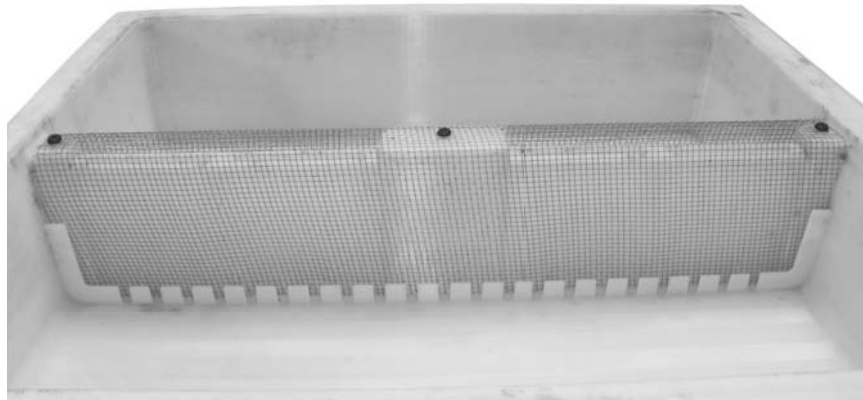

You have successfully assembled your Top Feeder Insert it can now be installed into a super and placed on the hive. If you have any questions feel free to call your nearest Mann Lake location. *Thank you for buying our product.*