


Plastic Uncapping Tank

HH-231

Package Contents:

- 1- Plastic Cover
- 1- Gray Tub with Honey Gate
- 1- Gray Tub without Bottom
- 1- Strainer Gate
- 1- Crossbar with 2 Bolts, 2 Nuts and 1 Screw
- 2 - 9½" (23.18 cm) Wood End Bars (used to tighten Honey Gate)

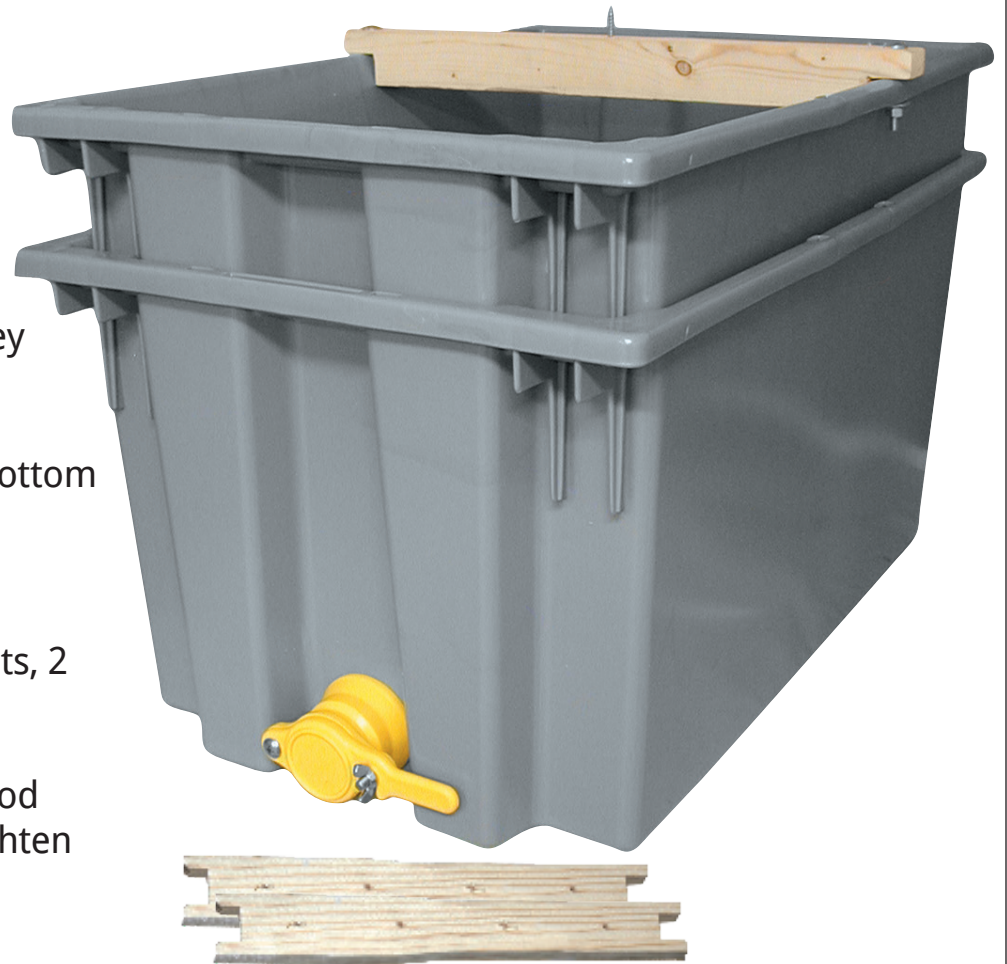

MLL 09-INS Rev: 10/29/18


MANN LAKE
WE KNOW BEES

501 1st St S, Hackensack, MN 56452
500 Santa Anita Dr., Woodland, CA 95776
485 Stewart Rd, Wilkes-Barre, PA 18706
1600 Commerce Street, Marshall, TX 75672

Telephone: 800-880-7694
www.mannlakeltd.com




Place the Wood End Bars on top of each other and insert them wide end first into the back of the Honey Gate and unscrew the back from the front of the Honey Gate. Place the Honey Gate front on the outside of the Gray Tub and the Honey Gate back on the inside of the tub and tighten both pieces together, using the Wood End Bars to help tighten the Honey Gate securely. **See above photos.**

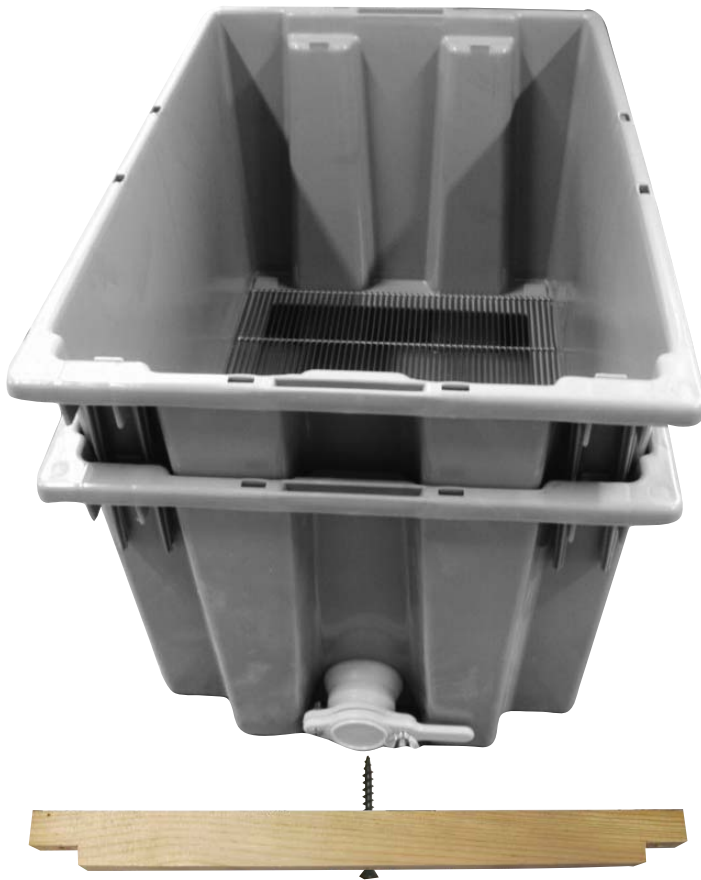


Take the pointed screw and insert it into the pre-drilled hole of the wood cross bar. Your frame will rest on this screw during uncapping.

Place the grate into the tub that does not have a bottom. Place that tub on top of the tub with the honey gate. When positioned as shown, the tub is used for uncapping.

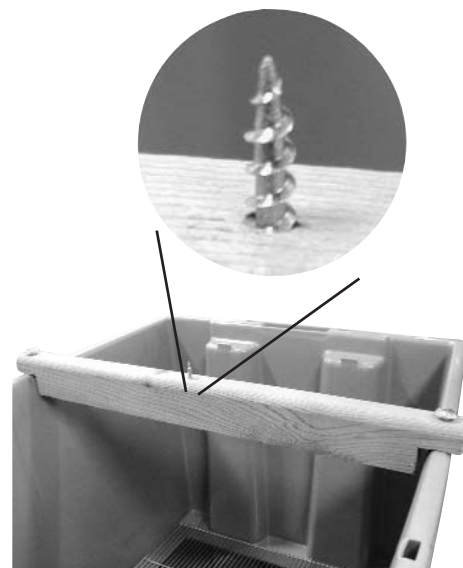

Attach the crossbar to the tub with the bolts and nuts provided. In general, hand tightening of the crossbar is all that is necessary.

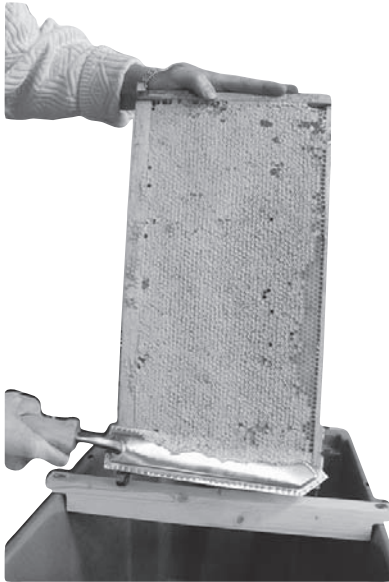

Uncap your frames completely using an uncapping knife and uncapping scratcher (both available separately)



To use as a straining tank, take the top tub off and rotate it 180 degrees before placing it back on the tub with the honey gate.

Cleaning Instructions

Wash all equipment before use. To clean, use warm to hot water with a soft cloth.

You May Also Consider

Uncapping Scratcher



HD-465

Plain Uncapping Knife



HD-420